

FULL COLOR BODY

20mm  
Thick



Excellent grace



FULL COLOR BODY

20mm  
Thick




HAMMER  
STONE GREY 600x600mm




600x900mm



600x1200mm

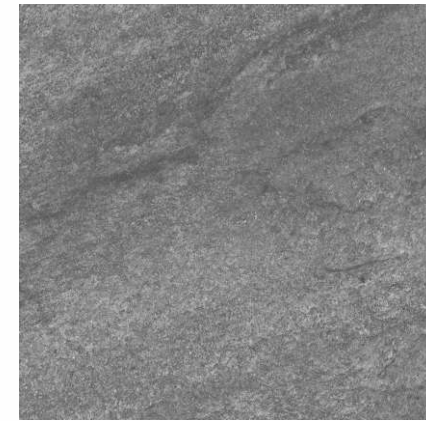


HAMMER  
STONE NERO 600x600mm

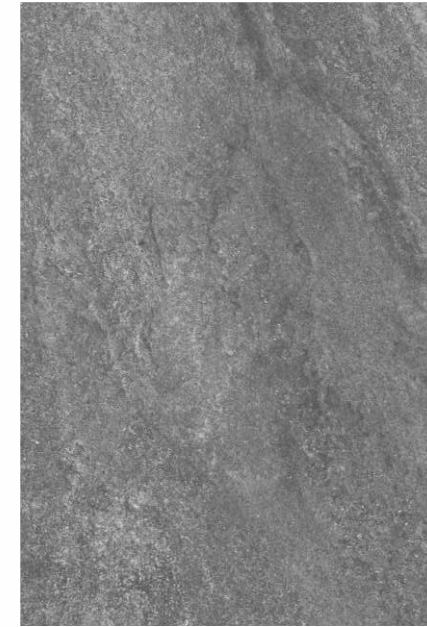

600x900mm



600x1200mm

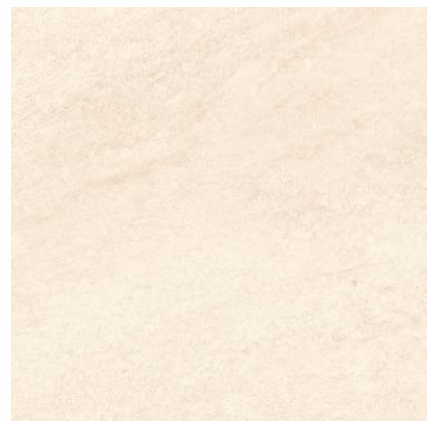


HAMMER  
STONE BEIGE 600x600mm



600x900mm



600x1200mm

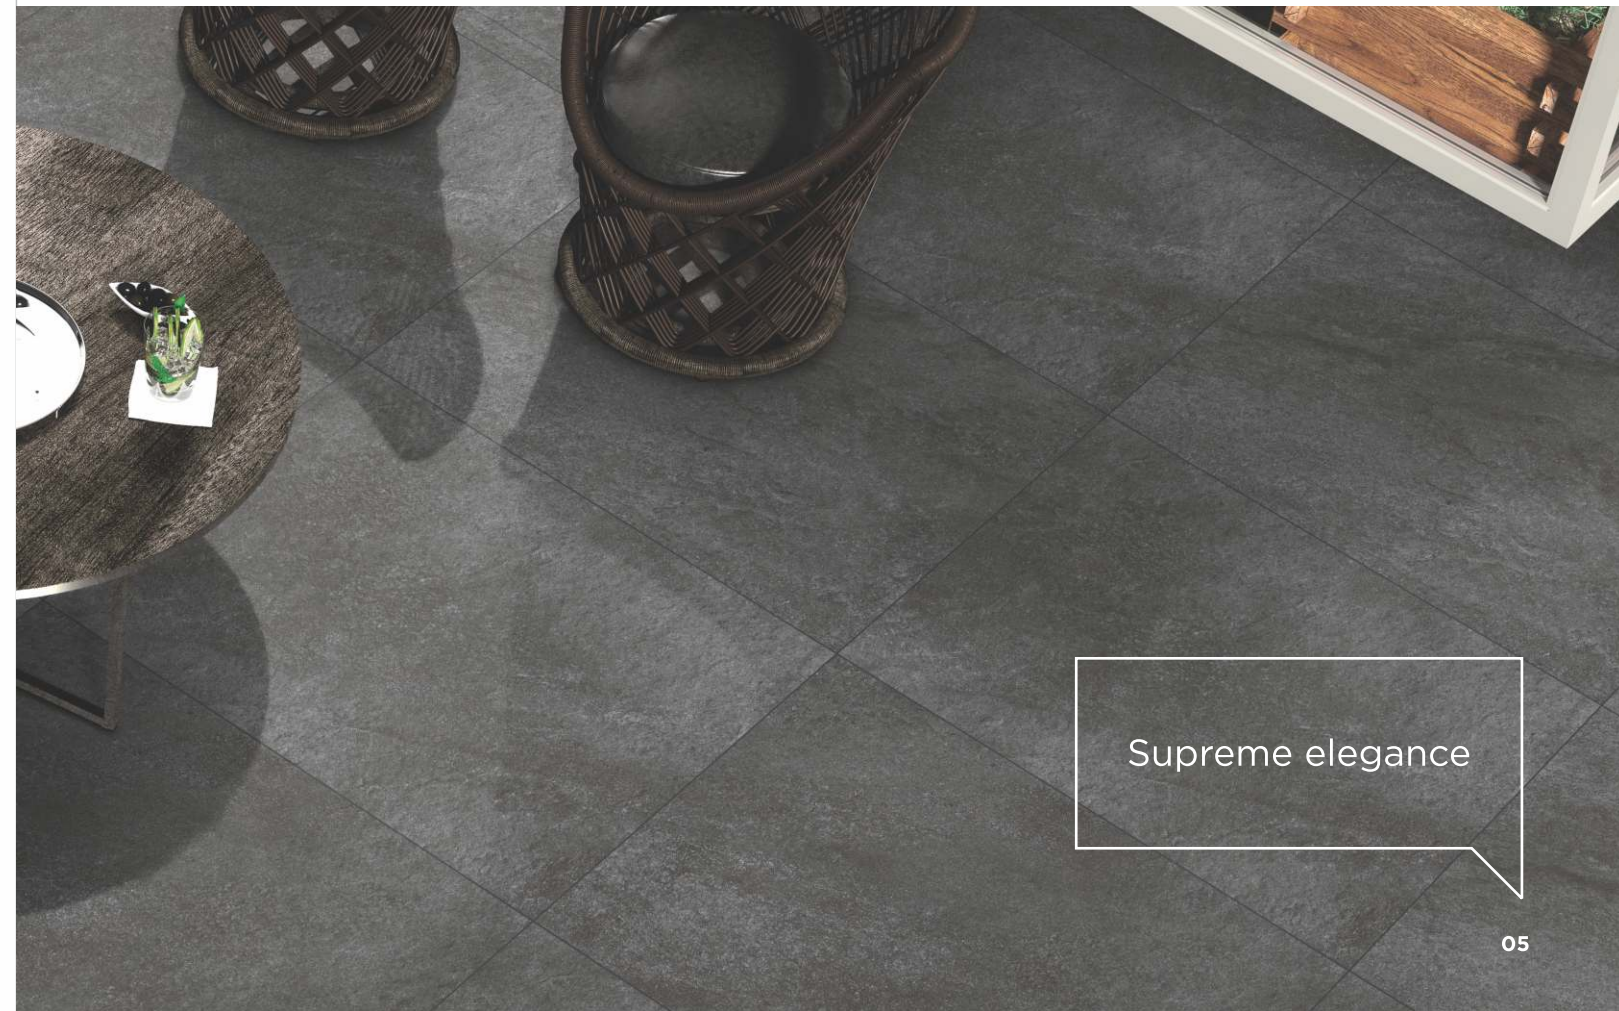

Supreme elegance



FULL COLOR BODY

20mm  
Thick




Charismatic appeal



FULL COLOR BODY


20mm  
Thick

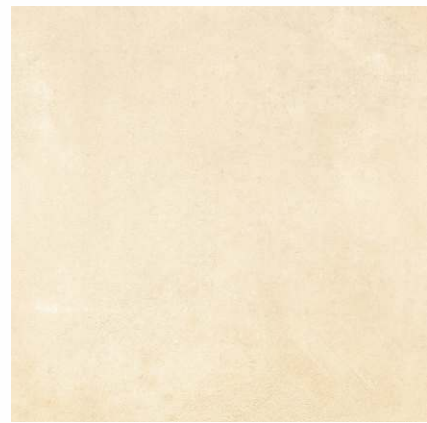


AOSTA CREAM 600x600mm



600x900mm

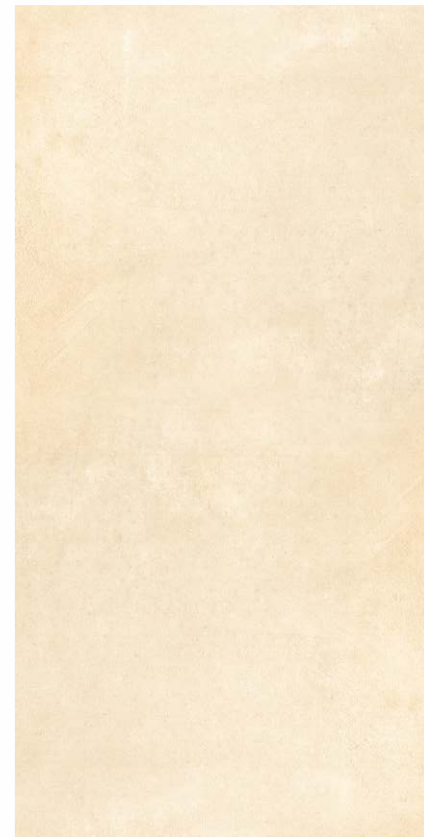


600x1200mm

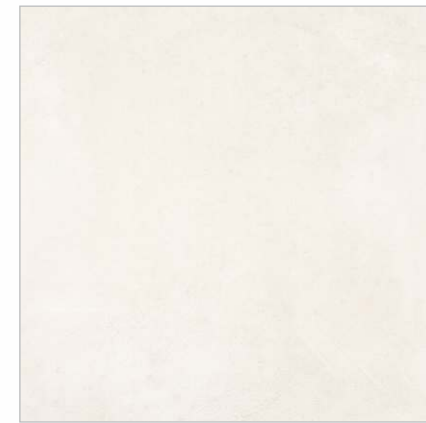

AOSTA WHITE 600x600mm



600x900mm

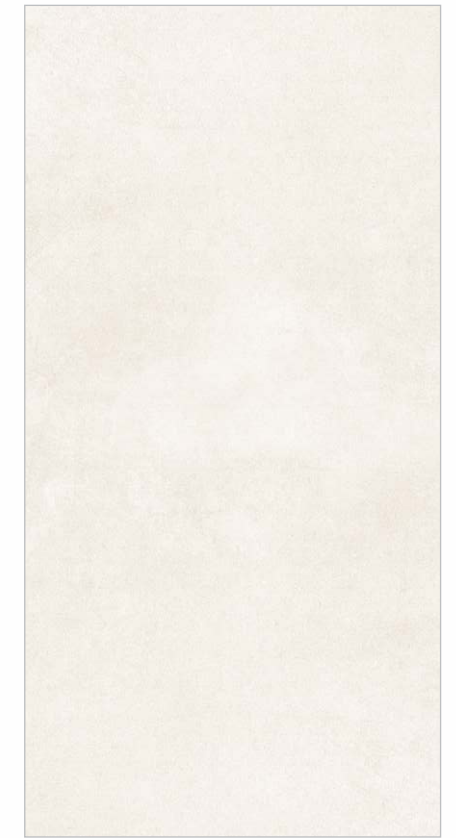

600x1200mm



AOSTA GREY 600x600mm



600x900mm



600x1200mm



Amazing flair



FULL COLOR BODY

20mm  
Thick




COUNTRY ANTRACITE 600x600mm



600x900mm



600x1200mm

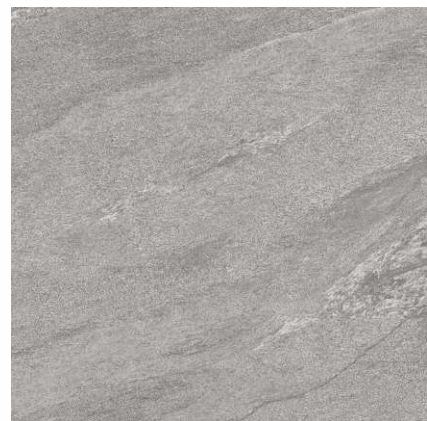


COUNTRY GRIS 600x600mm




600x900mm



600x1200mm

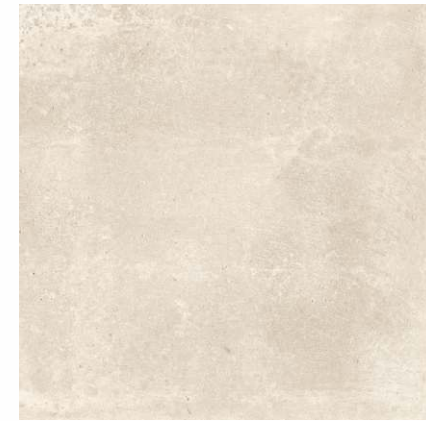

PESARO NATURAL 600x600mm

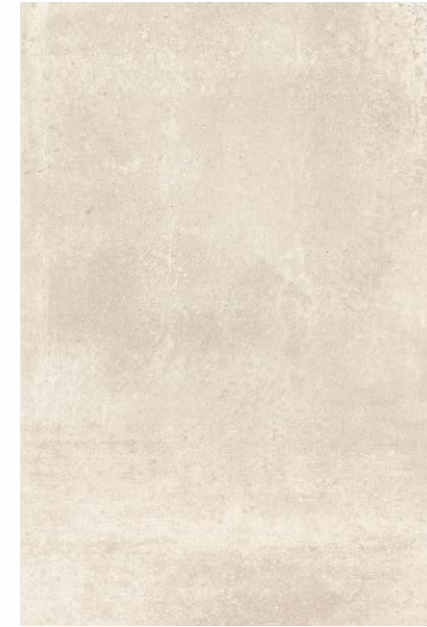

600x900mm



600x1200mm



PESARO BEIGE 600x600mm



600x900mm



600x1200mm



FULL COLOR BODY

20mm  
Thick



Remarkable majesty



FULL COLOR BODY

20mm  
Thick



AREZO DGY 600x600mm



600x900mm



600x1200mm



AREZO CHARCOAL 600x600mm



600x900mm



600x1200mm



AREZO LGY 600x600mm



600x900mm



600x1200mm



Fine craftsmanship



FULL COLOR BODY

20mm  
Thick



Enchanting brilliance



FULL COLOR BODY

20mm  
Thick



ROUGH BRUNO 600x600mm



600x900mm



600x1200mm




BESIDE GREY 600x600mm




600x900mm



600x1200mm

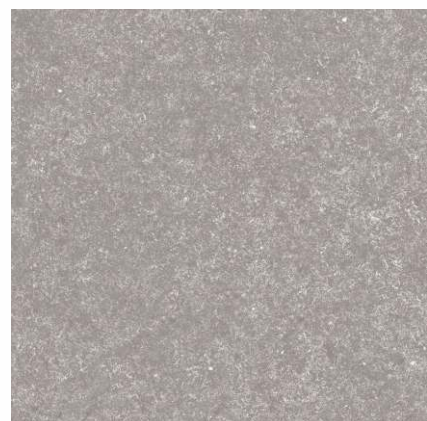

GENEVA 600x600mm

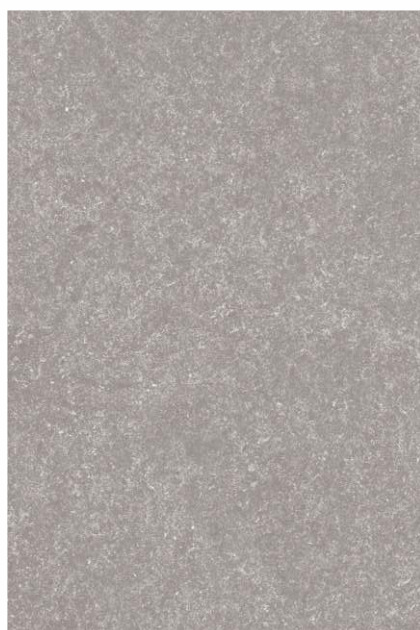

600x900mm



600x1200mm



Admirable creativity



FULL COLOR BODY | 20mm  
Thick




Intense style



FULL COLOR BODY


20mm  
Thick

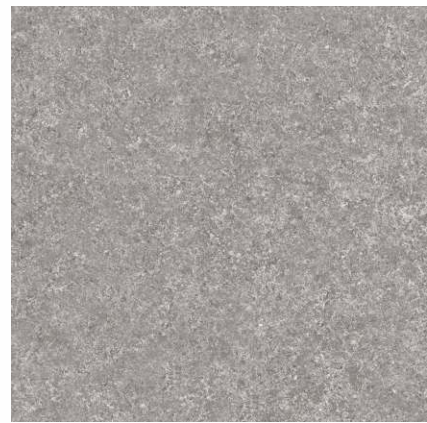


BLUE STONE GRIS 600x600mm



600x900mm

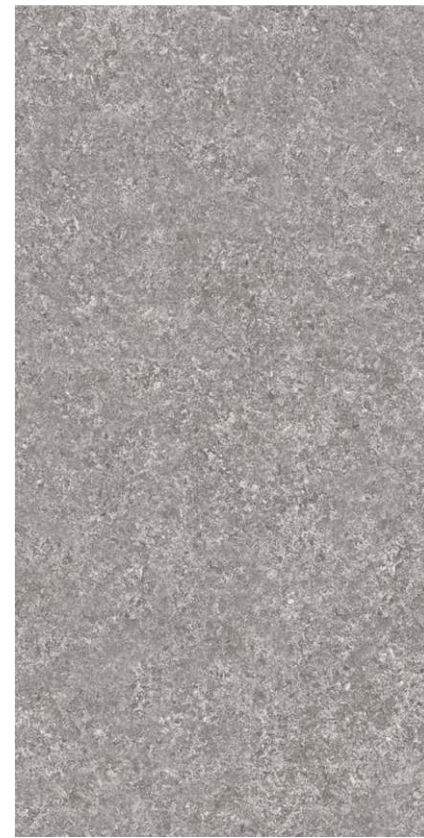


600x1200mm

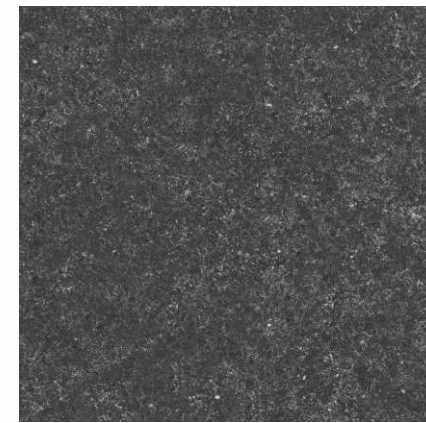

BLUE STONE  
NATURAL 600x600mm



600x900mm

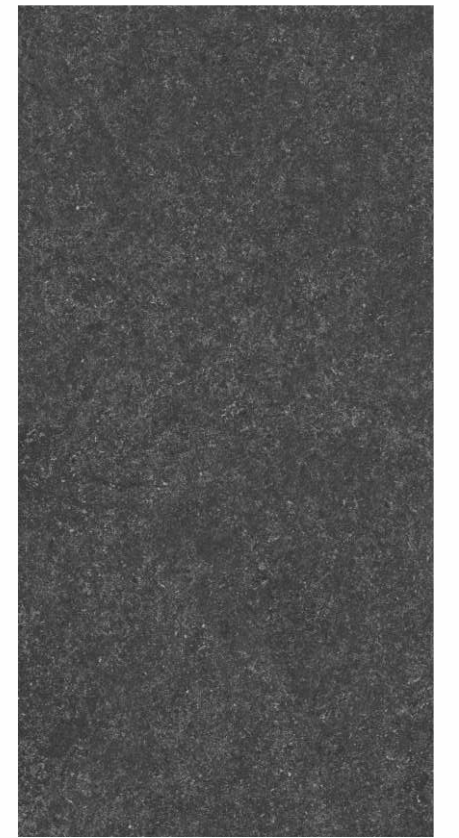

600x1200mm



BLUE STONE REAL 600x600mm



600x900mm



600x1200mm



Exceptional poise



FULL COLOR BODY

20mm  
Thick



Superb magnificence



FULL COLOR BODY

**20mm**  
Thick



Befriend glory



FULL COLOR BODY | **20mm**  
Thick



Wonderful radiance

### TECHNICAL SPECIFICATION

Sr. No.	CHARACTERISTICS	STANDARD AS PER IS 15622:2006 GROUP BIA	MEAN VALUE OF VITRIFIED TILES
<b>Regulatory Properties</b>			
1	Deviation in length & width	±0.5 %	±0.1 %
2	Deviation in thickness	±5.0 %	±3.0 %
3	Straightness of sides	±0.5 %	±0.1 %
4	Rectrangularity	±0.5 %	±0.1 %
5	Surface Flatness	±0.5 %	±0.2 %
6	Glossiness	As per mfg.	Matt surface
<b>Structural Properties</b>			
7	Water absorption	<0.50 %	≤ 0.10 %
8	Apparent density	>2.0 g/cc	>2.10 g/cc
<b>Massive Mechanical Properties</b>			
9	Modulus Rupture	MIN 35 N/mm <sup>2</sup>	MIN 40 N/mm <sup>2</sup>
10	Impact resistance	As per mfg.	Min. 0.55
<b>Surface Mechanical Properties</b>			
11	Surface abrasion resistance	As per mfg.	Min Class 5
12	MOH's hardness	As per mfg.	Min 5
<b>Thermo Hydrometric Properties</b>			
13	Frost resistance	No Damage	No Damage
14	Thermal shock resistance	No Damage	No Damage
15	Moisture expansion	Nil	Nil
16	Crazing resistance	As per mfg.	Min. 10 Cycle
<b>Chemical Properties</b>			
17	Chemical resistance	No Damage	No Damage
18	Stain resistance	Resistance	Resistance
<b>Safety Properties</b>			
19	Anti Skid (COF)	As per mfg.	Matt <0.75
20	Fire resistance	As per mfg.	Fire proof

### PACKING DETAILS

Sr. No.	Size	THICKNESS (in mm)	NO OF TILES/BOX	COVERAGE (SQ.MTR/BOX)	Weight / Box (kg)
1	600x600mm	20 mm	2	0.72 sq.mtr	32.75
2	600x900mm	20 mm	1	0.54 sq.mtr	24.6
3	600x1200mm	20 mm	1	0.72 sq.mtr	32.75